

by Frame






CEILING
SUSPENDED

by Frame

POSSIBLE CUSTOM SHAPES :

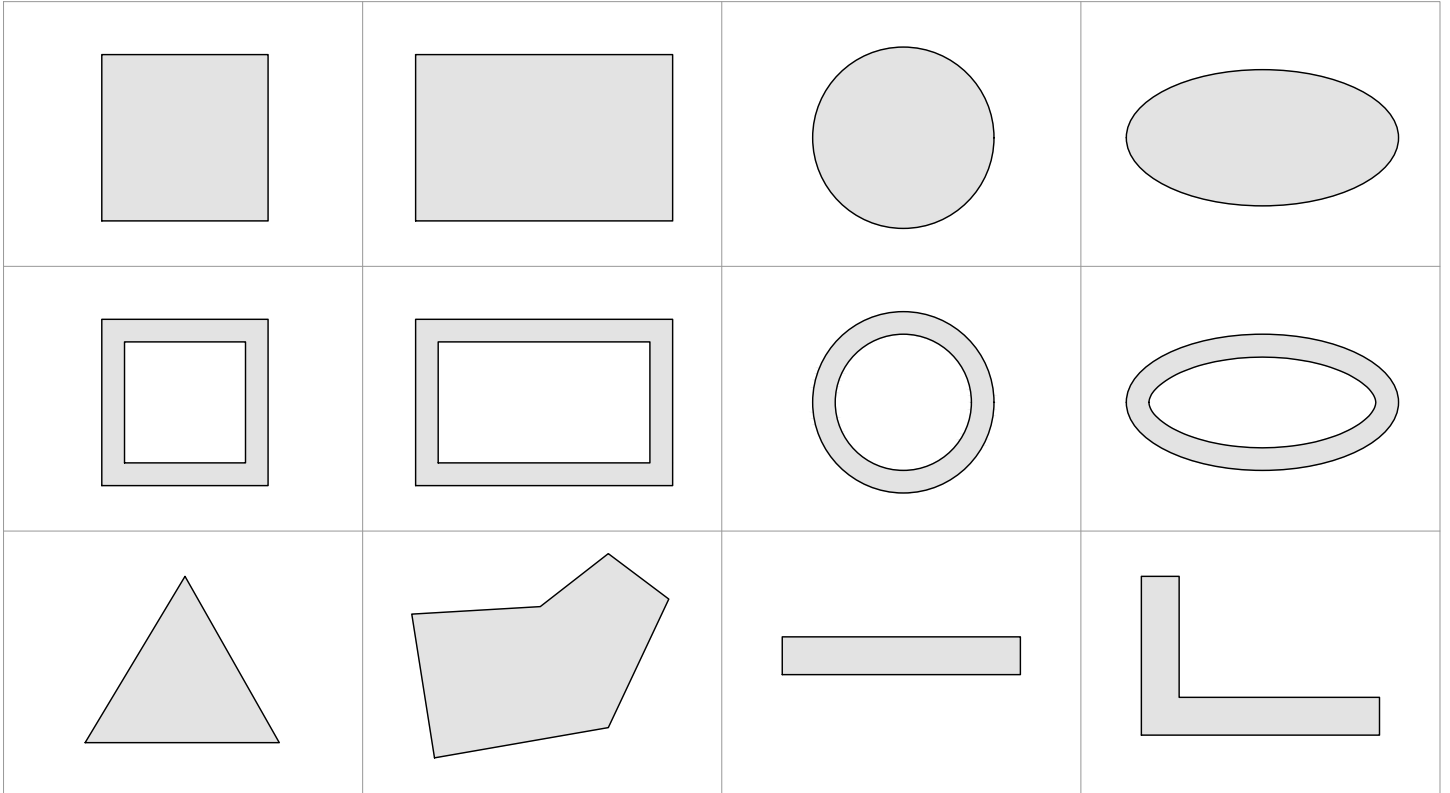



by Frame

GENERAL SPECIFICATION

DIMENSION	Made to measure : - Max overall size: 79.0 x 120.0 in (2006.6 x 3048.0 mm)
COLOUR TEMPERATURES	 2700 K  3200 K  3500 K  4100 K  5000 K  Tunable white  RGB  RGB +W and other K under request
INPUT VOLTAGE	24V DC
DRIVER	AC DC 24V DC OUTPUT (class 2 Power Unit)
DIMMABILITY	by all existing systems
POWER CONSUMPTION	Standard bright 4.5 W per linear ft (14 W per linear mt) High bright 9.0 W per linear ft (28 W per linear mt)
WEIGHT	5.7 lbs/sq. ft (25 Kg/sq. mt)
IP GRADE	IP40
LUMEN DELIVERED	Standard bright 280 lm per linear ft (890 lm per linear mt) High bright 570 lm per linear ft (1632 lm per linear mt)
LIFE TIME	70.000 hrs
WARRANTY	3 Years (36 month)
CERTIFICATIONS	<ul style="list-style-type: none"> • Ceiling surface Mounted • Ceiling recessed Type IC Inherently protected • Wall surface Mounted • NEW Storage Area of a Clothes Closet • UL94 (in accordance with the requirements of ASTM E 84, ANSI / UL 723, or CAN / ULC-S102)*  


* to be asked at the order time if needed.



by Frame

TYPE OF FIXING	SUSPENDED
METHOD OF FIXING SYSTEM	BY FRAME SINGLE FIXTURE
BACKLIGHT MODELS ABLE TO BE FIXED BY FRAME	MAGIC CLOUD
DIMENSION	Max overall size: 79.0 x 120.0 in (2006.6 x 3048.0 mm)



SECTION: 2A

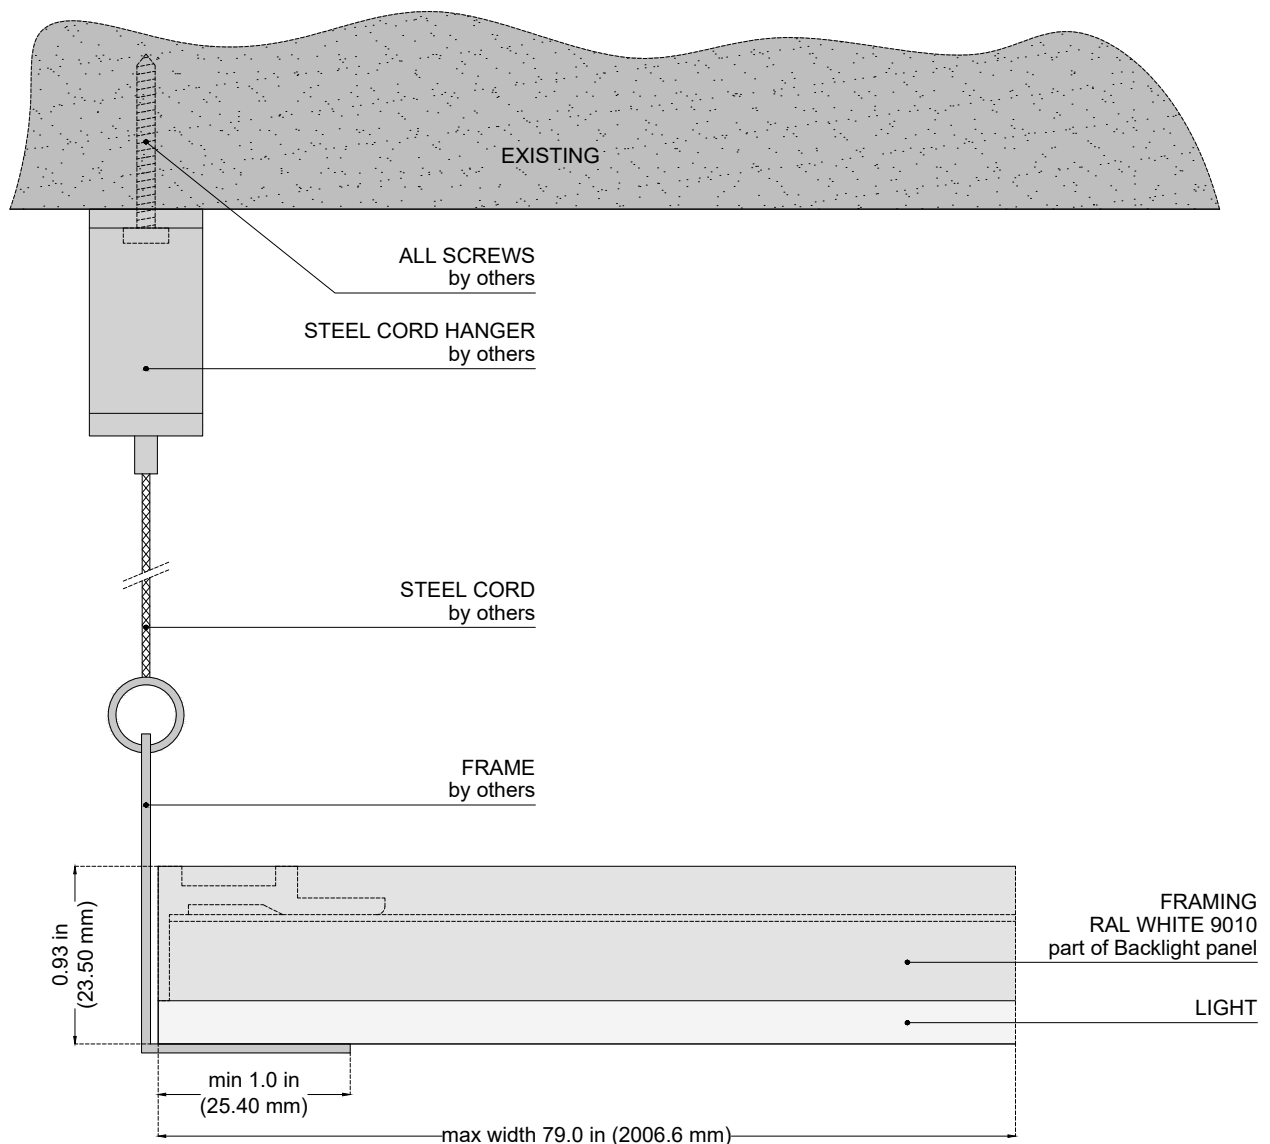



CEILING
SUSPENDED

by Frame

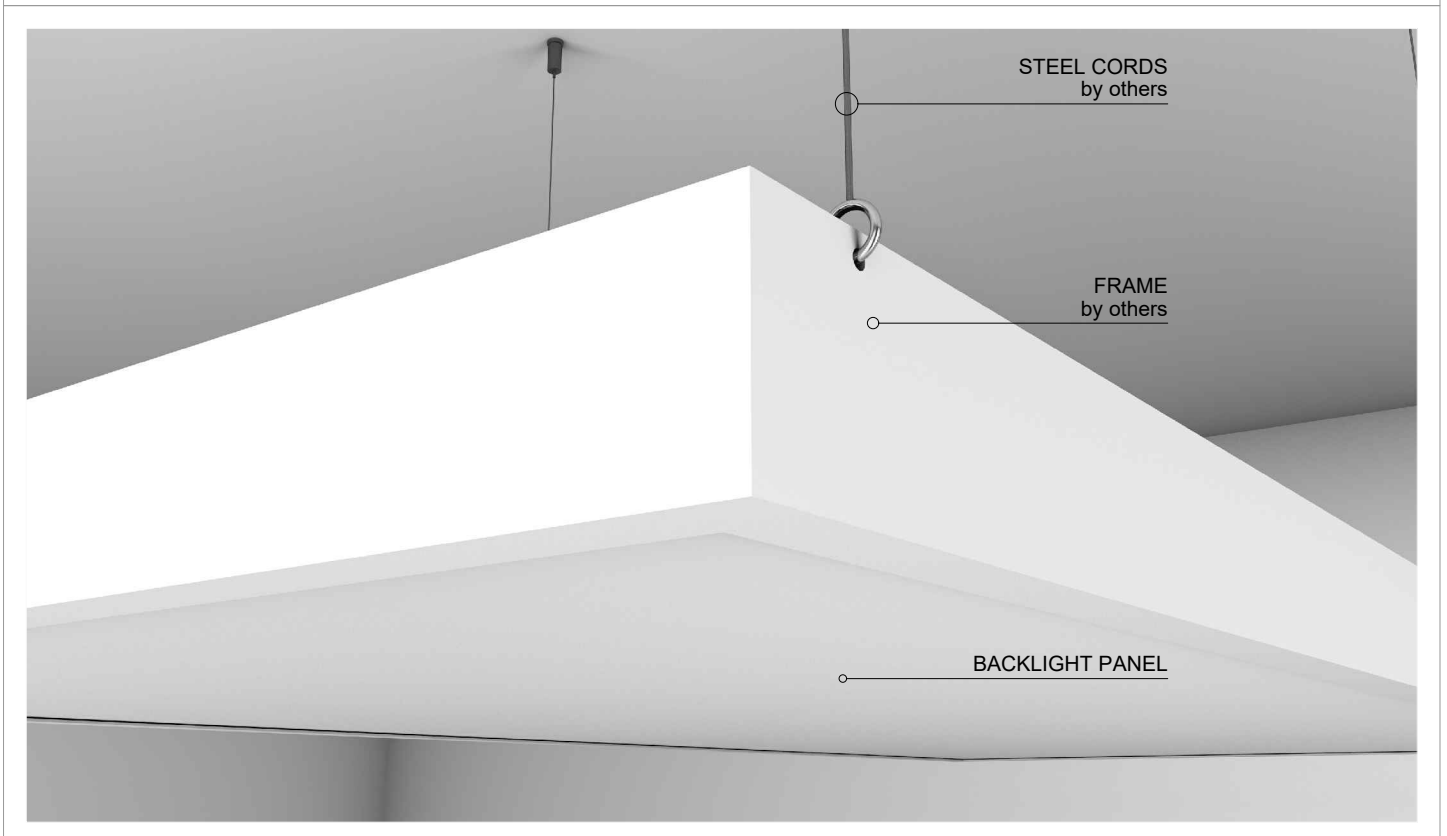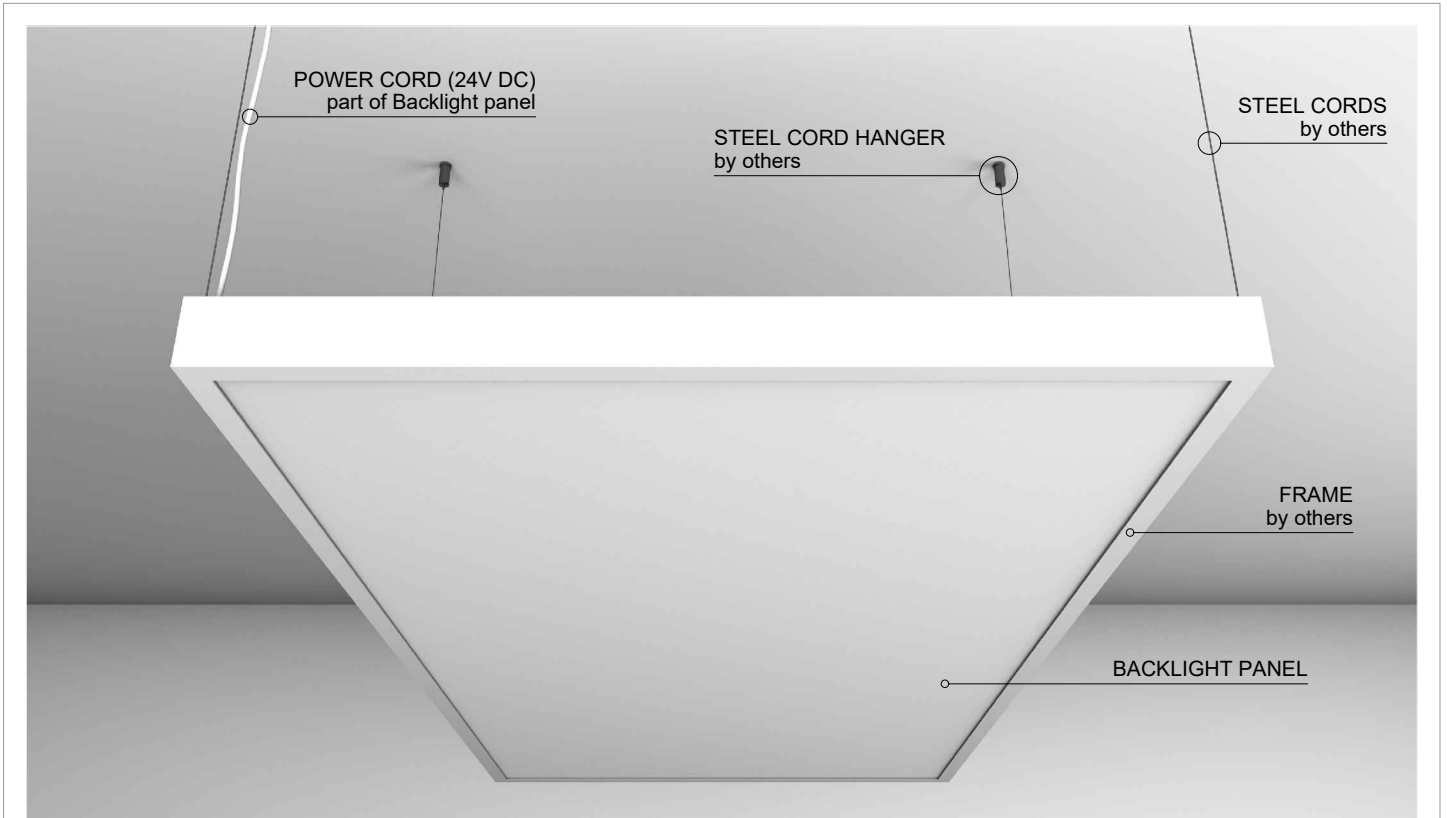




by Frame




TYPE OF FIXING	SUSPENDED
METHOD OF FIXING SYSTEM	BY FRAME MANY MODULES
BACKLIGHT MODELS ABLE TO BE FIXED BY FRAME	MAGIC CLOUD
DIMENSION	Max overall size: 79.0 x 120.0 in (2006.6 x 3048.0 mm)





SECTION: 2A

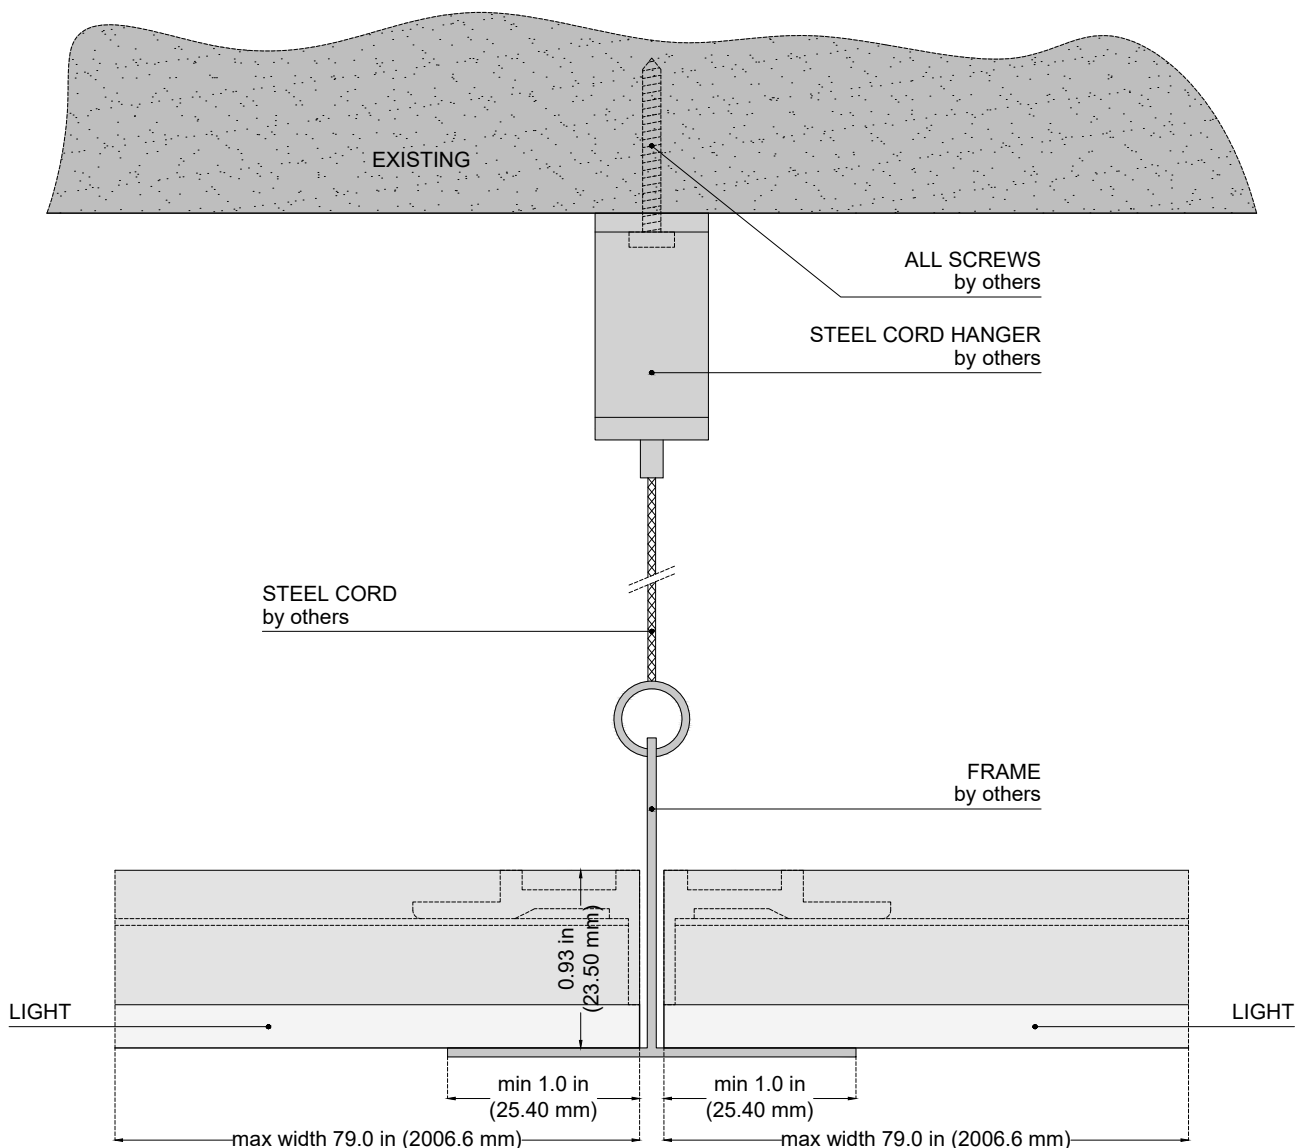



by Frame

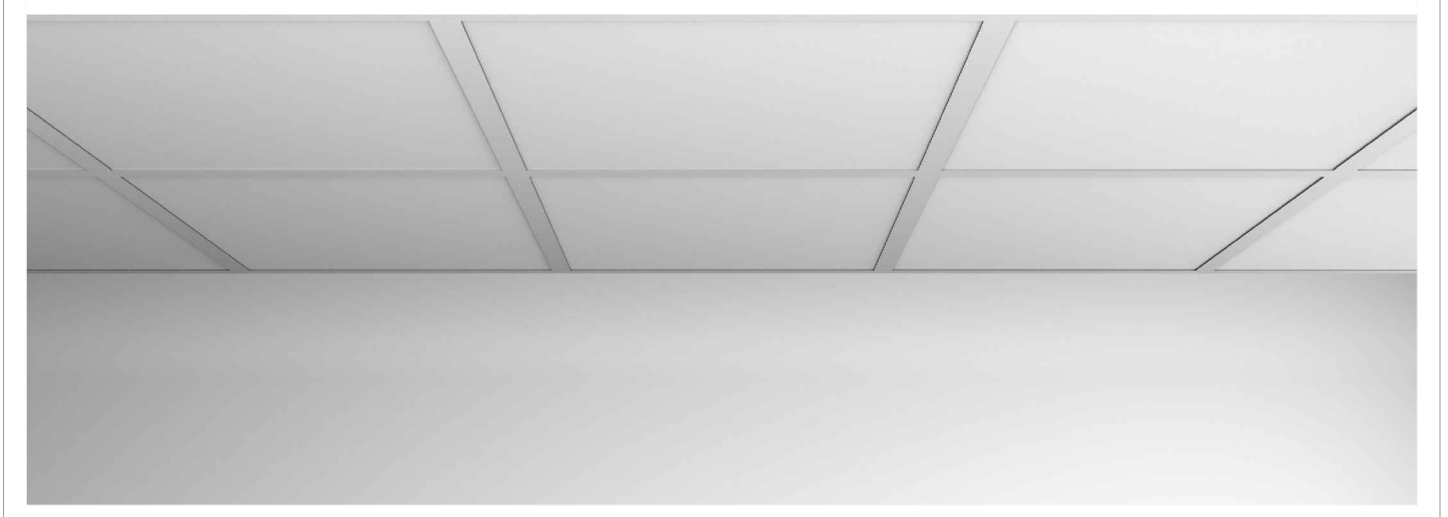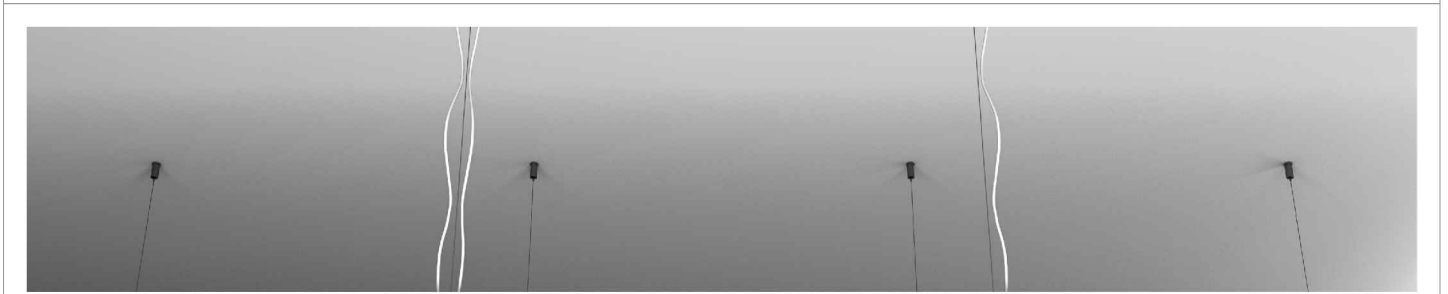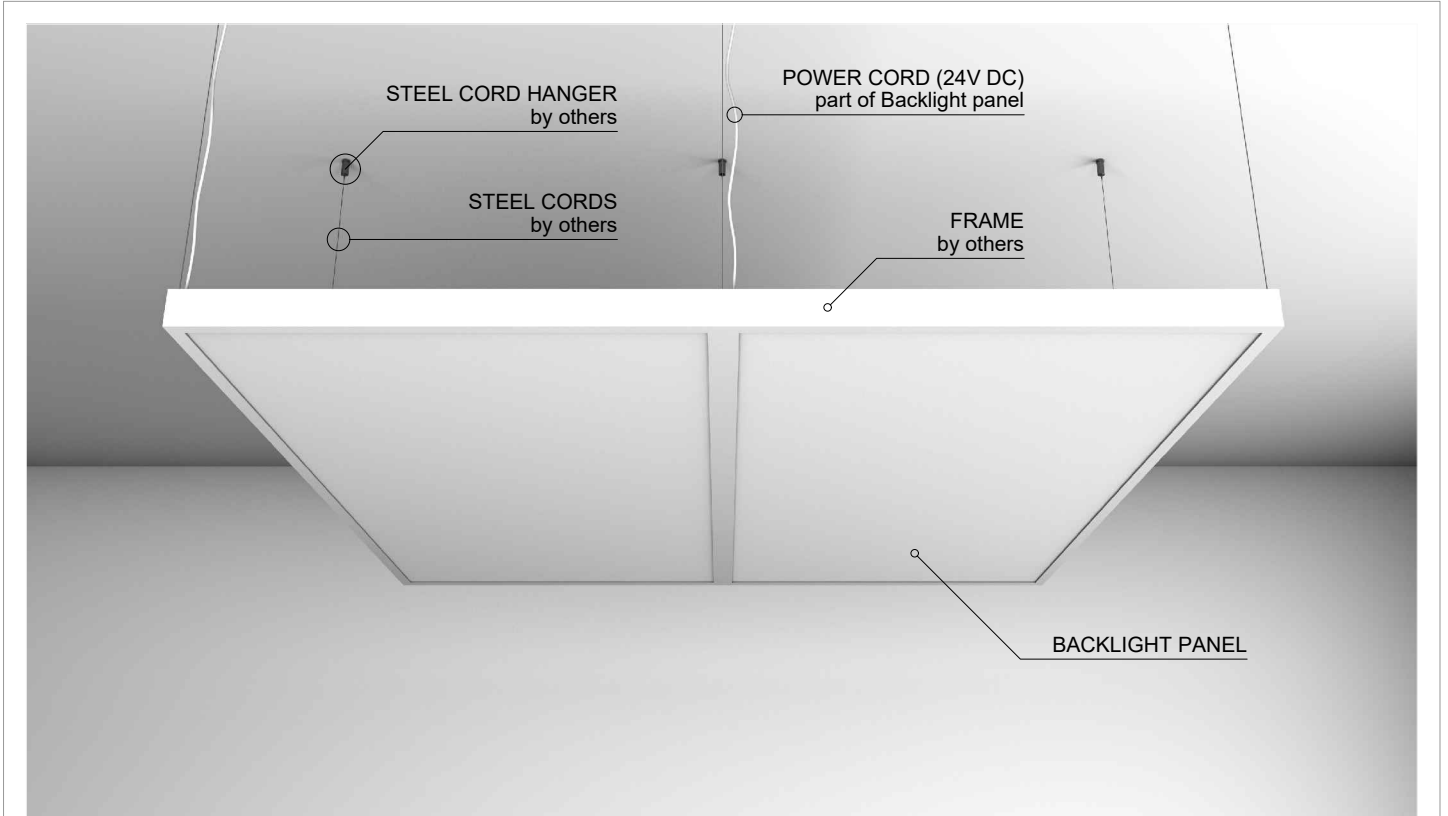

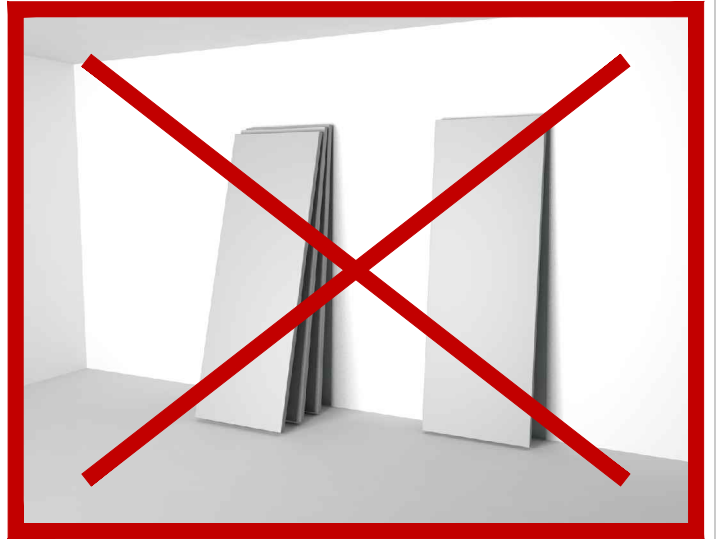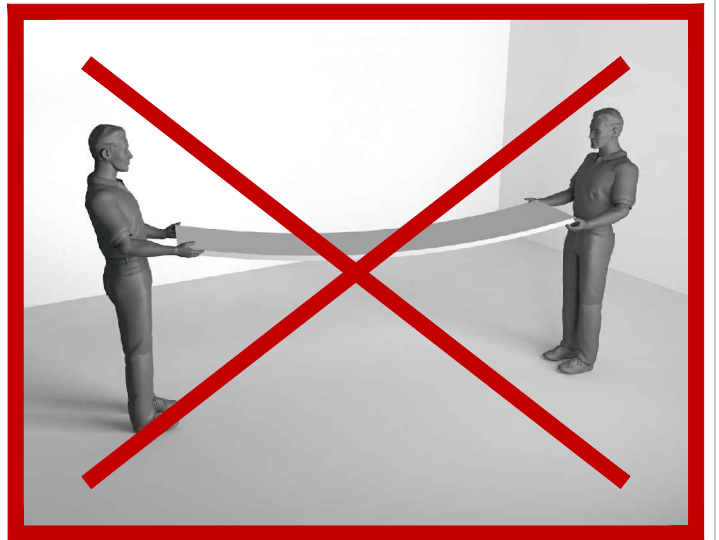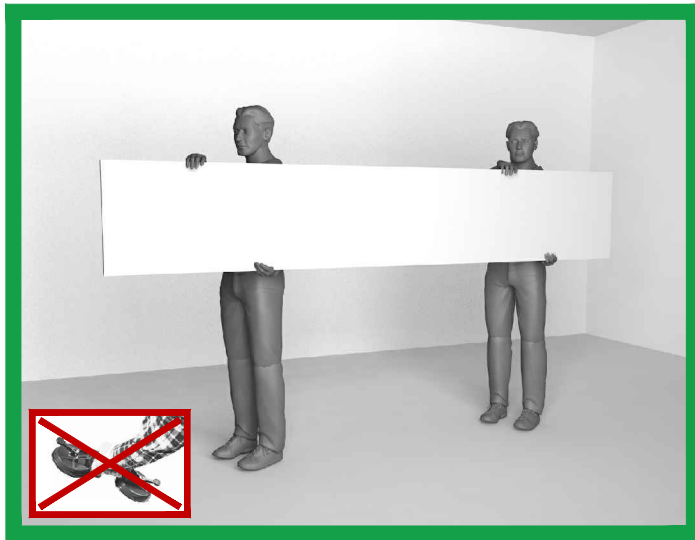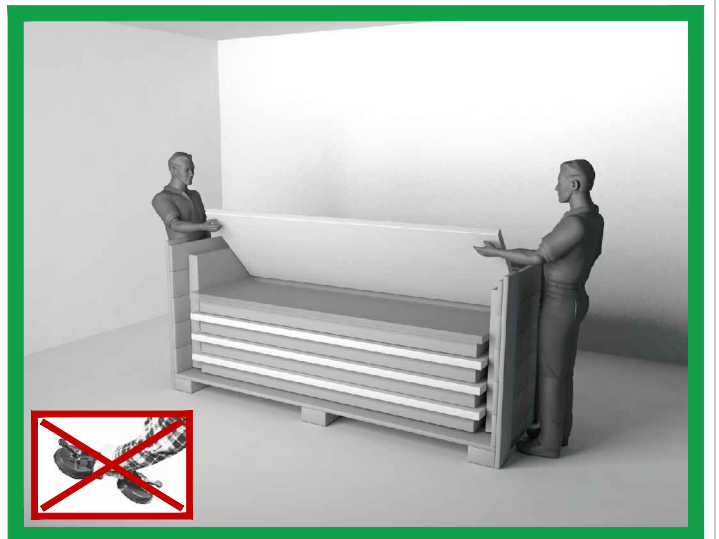



WARNINGS



DO NOT WET



DO NOT USE DETERGENTS



DO NOT USE HUMID FABRICS