





POSSIBLE CUSTOM SHAPES :

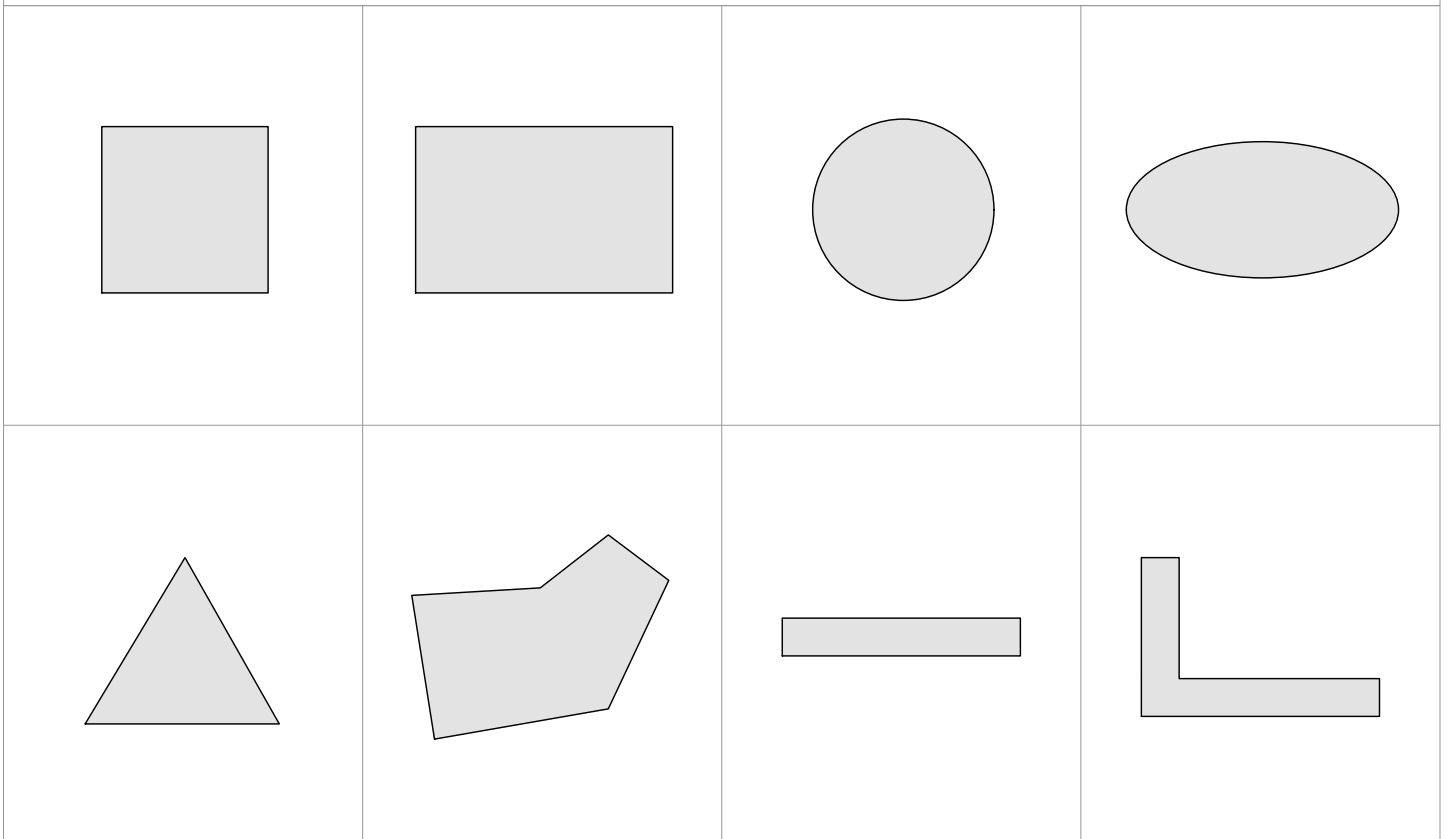

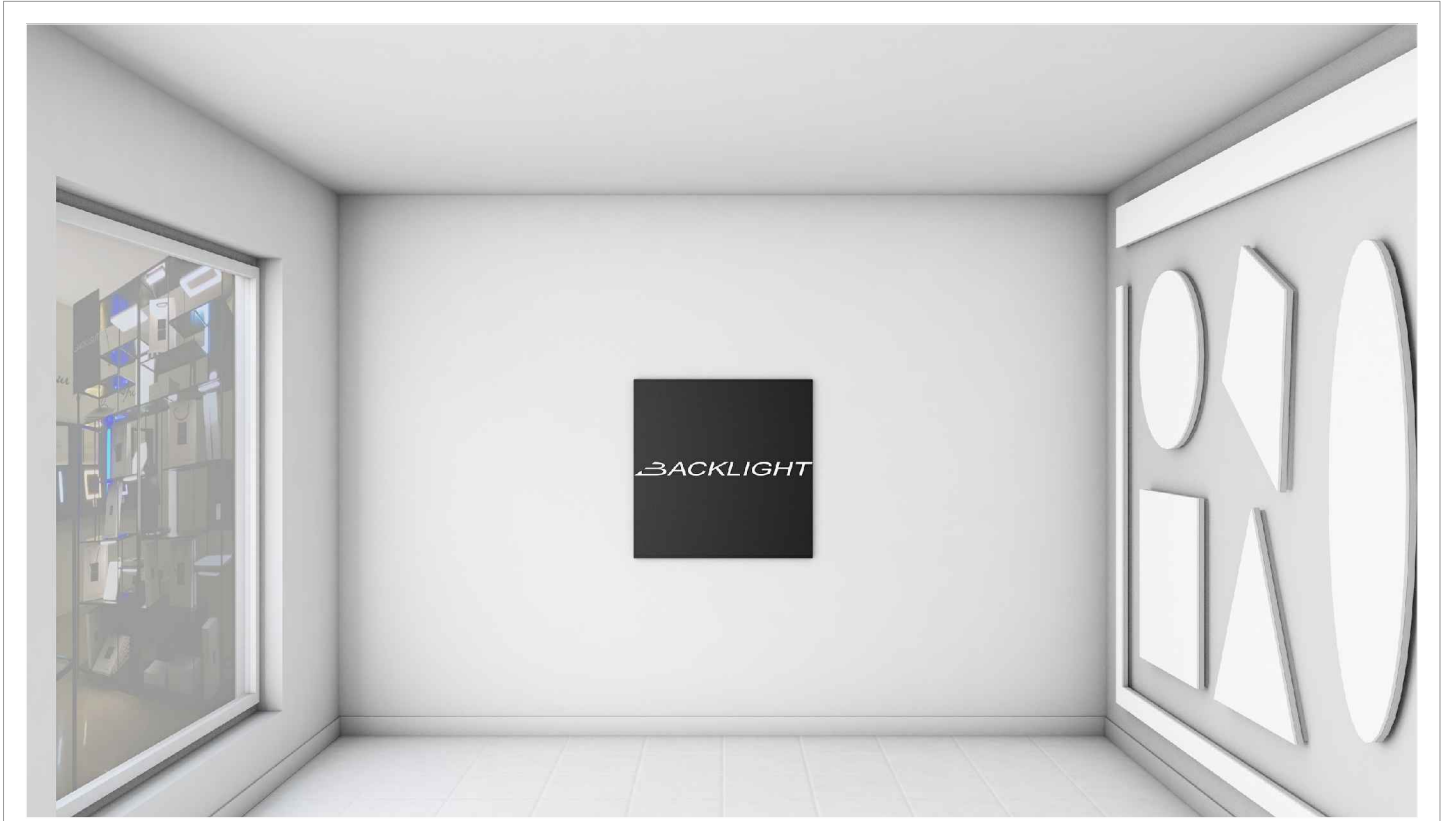

## GENERAL SPECIFICATION

DIMENSION	Made to measure : overall size: width 6.0 to 79.0 in (152.4 x 2006.6 mm) length 4.0 to 120.0 in (101.6 x 3048.0 mm)
COLOUR TEMPERATURES	 2700 K  3200 K  3500 K  4100 K  5000 K  Tunable white  RGB  RGB +W and other K under request
INPUT VOLTAGE	24V DC
DRIVER	AC DC 24V DC OUTPUT (class 2 Power Unit)
DIMMABILITY	by all existing systems
POWER CONSUMPTION	Standard bright 4.5 W per linear ft (14 W per linear mt) High bright 9.0 W per linear ft (28 W per linear mt)
WEIGHT	5.7 lbs/sq. ft (25 Kg/sq. mt)
IP GRADE	IP40
LUMEN DELIVERED	Standard bright 280 lm per linear ft (890 lm per linear mt) High bright 570 lm per linear ft (1632 lm per linear mt)
LIFE TIME	70.000 hrs
WARRANTY	3 Years (36 month)
CERTIFICATIONS	<ul style="list-style-type: none"> <li>• Ceiling surface Mounted</li> <li>• Ceiling recessed Type IC Inherently protected</li> <li>• Wall surface Mounted</li> <li>• NEW Storage Area of a Clothes Closet</li> <li>• UL94 (in accordance with the requirements of ASTM E 84, ANSI / UL 723, or CAN / ULC-S102)*</li> </ul>  


\* to be asked at the order time if needed.



# Nofall Plus

TYPE OF FIXING	SURFACE
NAME OF FIXING SYSTEM	NOFALL PLUS
BACKLIGHT MODELS ABLE TO BE FIXED BY NOFALL PLUS	MAGIC CLOUD - FLUSH
DIMENSION	Overall size: width 6.0 to 79.0 in (152.4 to 2006.6 mm) length 4.0 to 120.0 in (101.6 to 3048.0 mm)

## SECTION: 2A-NP

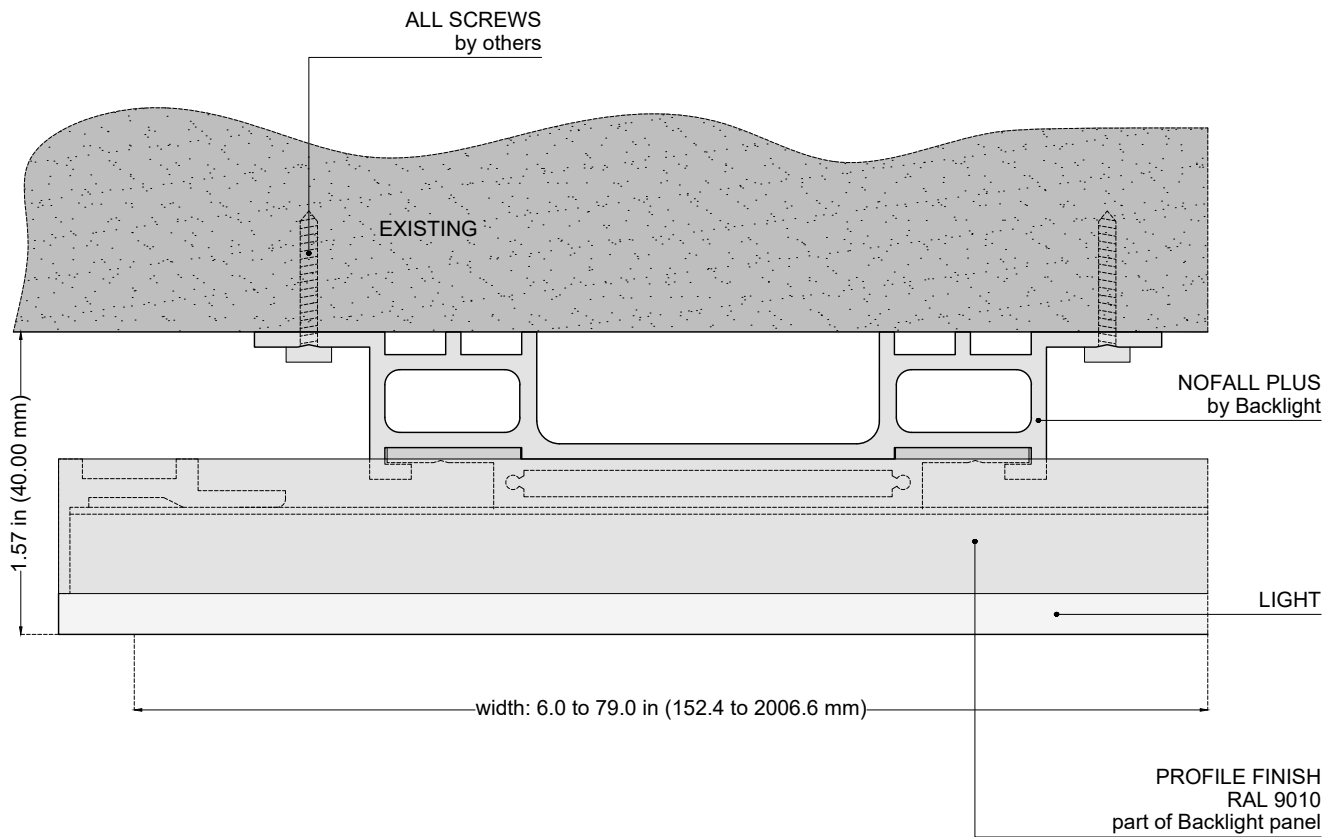




# Nofall Plus

TYPE OF FIXING	SURFACE
NAME OF FIXING SYSTEM	NOFALL PLUS
BACKLIGHT MODELS ABLE TO BE FIXED BY NOFALL PLUS	MAGIC CLOUD - FLUSH
DIMENSION	Overall size: width 6.0 to 79.0 in (152.4 to 2006.6 mm) length 4.0 to 120.0 in (101.6 to 3048.0 mm)

## SECTION: 6-NP

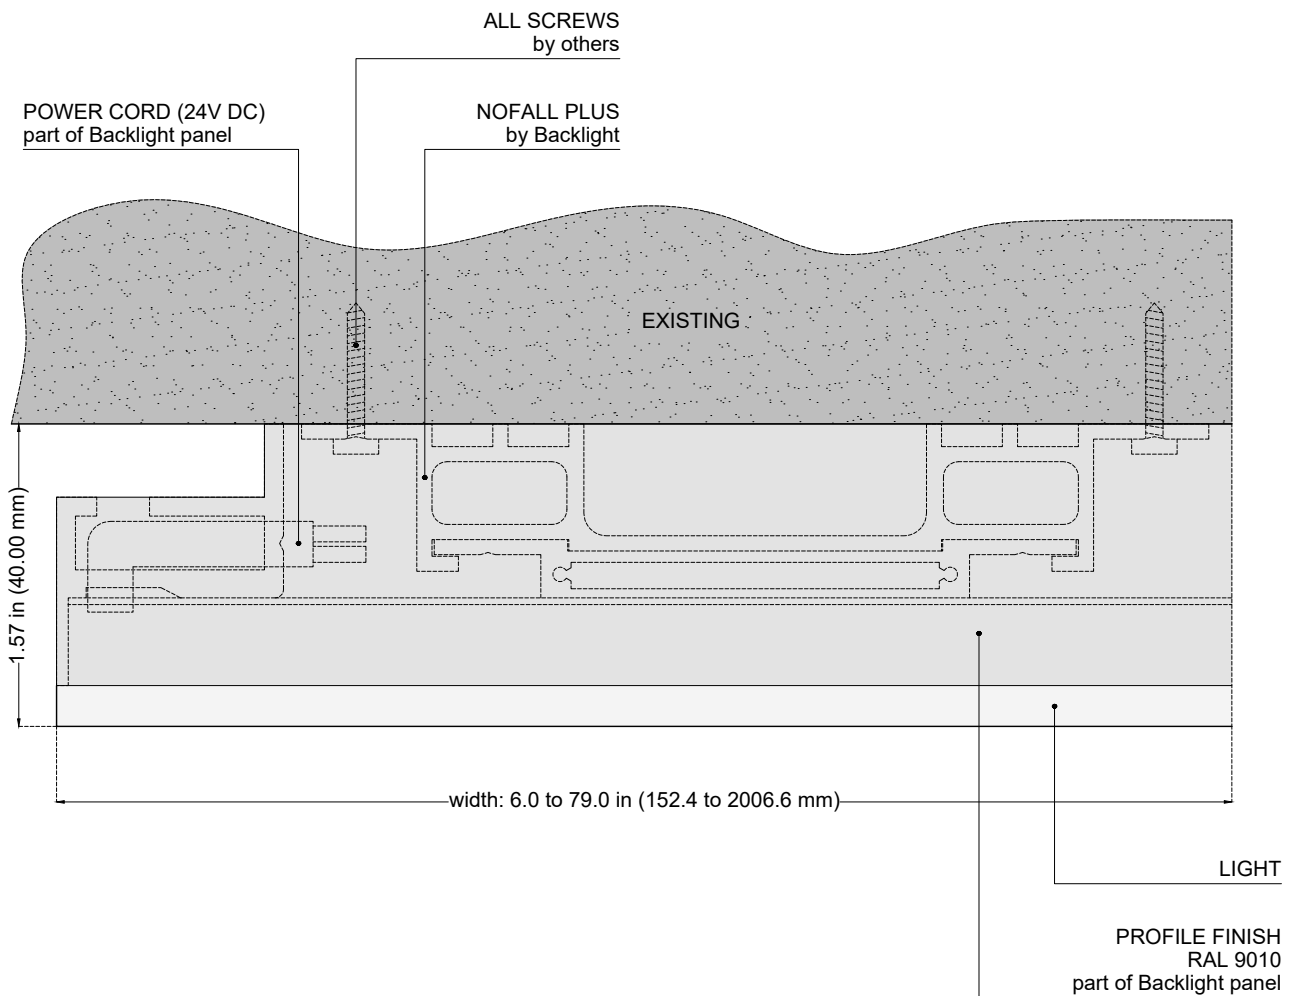




# Nofall Plus

TYPE OF FIXING	SURFACE
NAME OF FIXING SYSTEM	NOFALL PLUS
BACKLIGHT MODELS ABLE TO BE FIXED BY NOFALL PLUS	MAGIC CLOUD - FLUSH
DIMENSION	Overall size: width 6.0 to 79.0 in (152.4 to 2006.6 mm) length 4.0 to 120.0 in (101.6 to 3048.0 mm)

## SECTION: 7A-NP

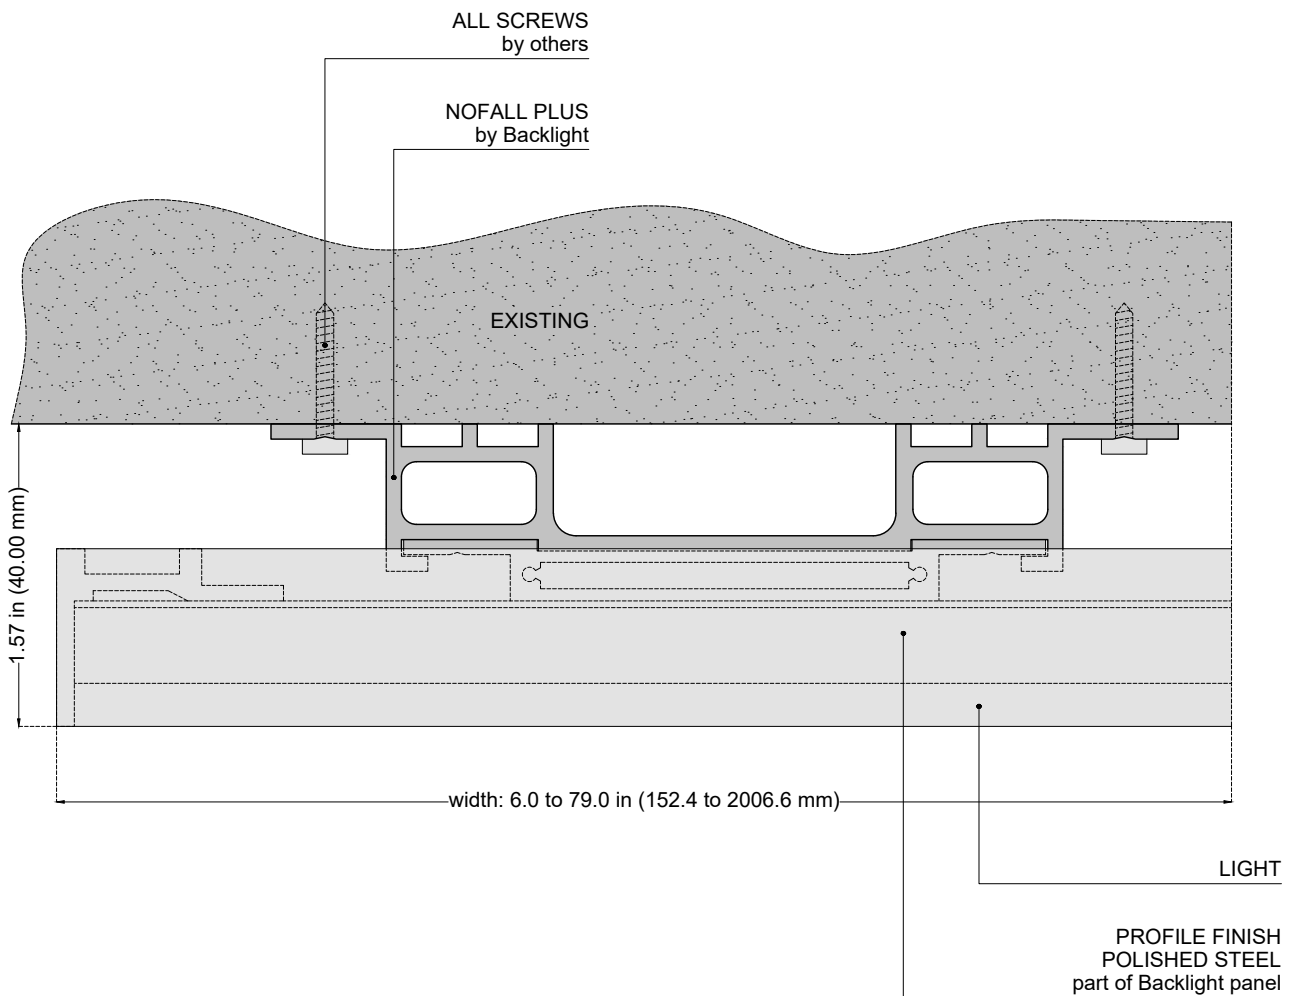




# Nofall Plus

TYPE OF FIXING	SURFACE
NAME OF FIXING SYSTEM	NOFALL PLUS
BACKLIGHT MODELS ABLE TO BE FIXED BY NOFALL PLUS	MAGIC CLOUD - FLUSH
DIMENSION	Overall size: width 6.0 to 79.0 in (152.4 to 2006.6 mm) length 4.0 to 120.0 in (101.6 to 3048.0 mm)


## SECTION: 8A-NP

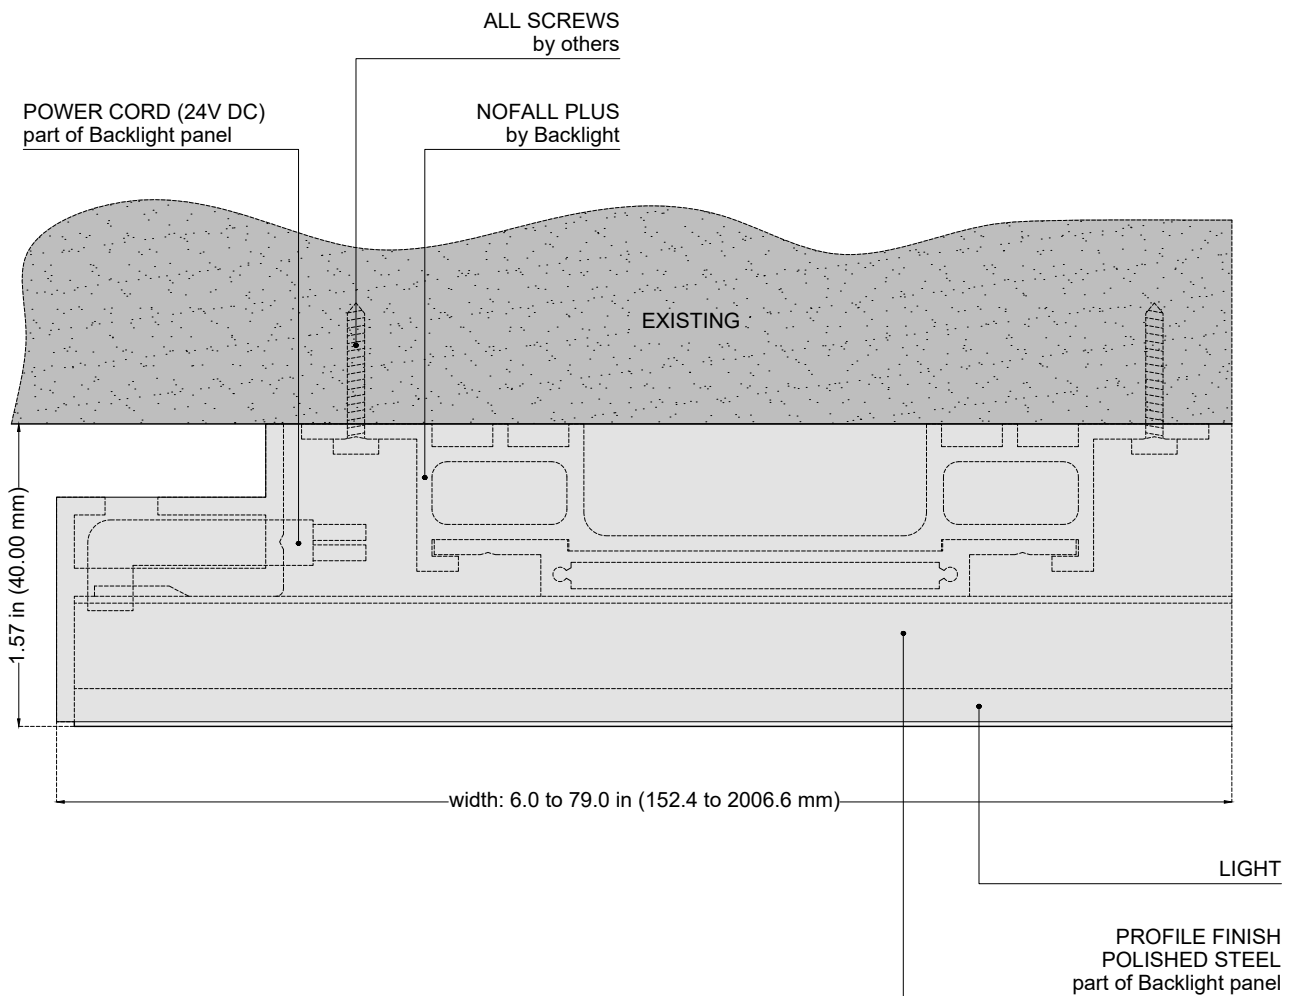




# FIXING SYSTEMS *Nofall Plus*

Suggested for big panels  
NOFALL PLUS

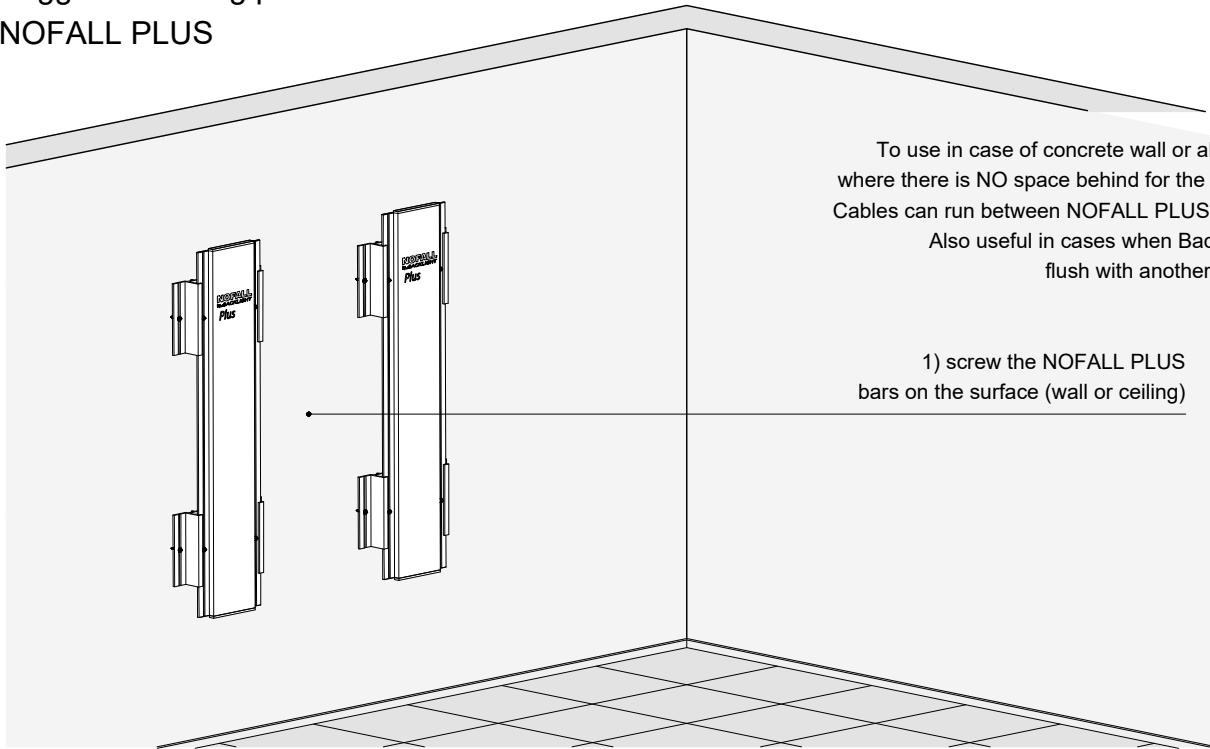

To use in case of concrete wall or all other situations where there is NO space behind for the electrical cables. Cables can run between NOFALL PLUS and the surface. Also useful in cases when Backlight to go flush flush with another false wall panel.

1) screw the NOFALL PLUS bars on the surface (wall or ceiling)

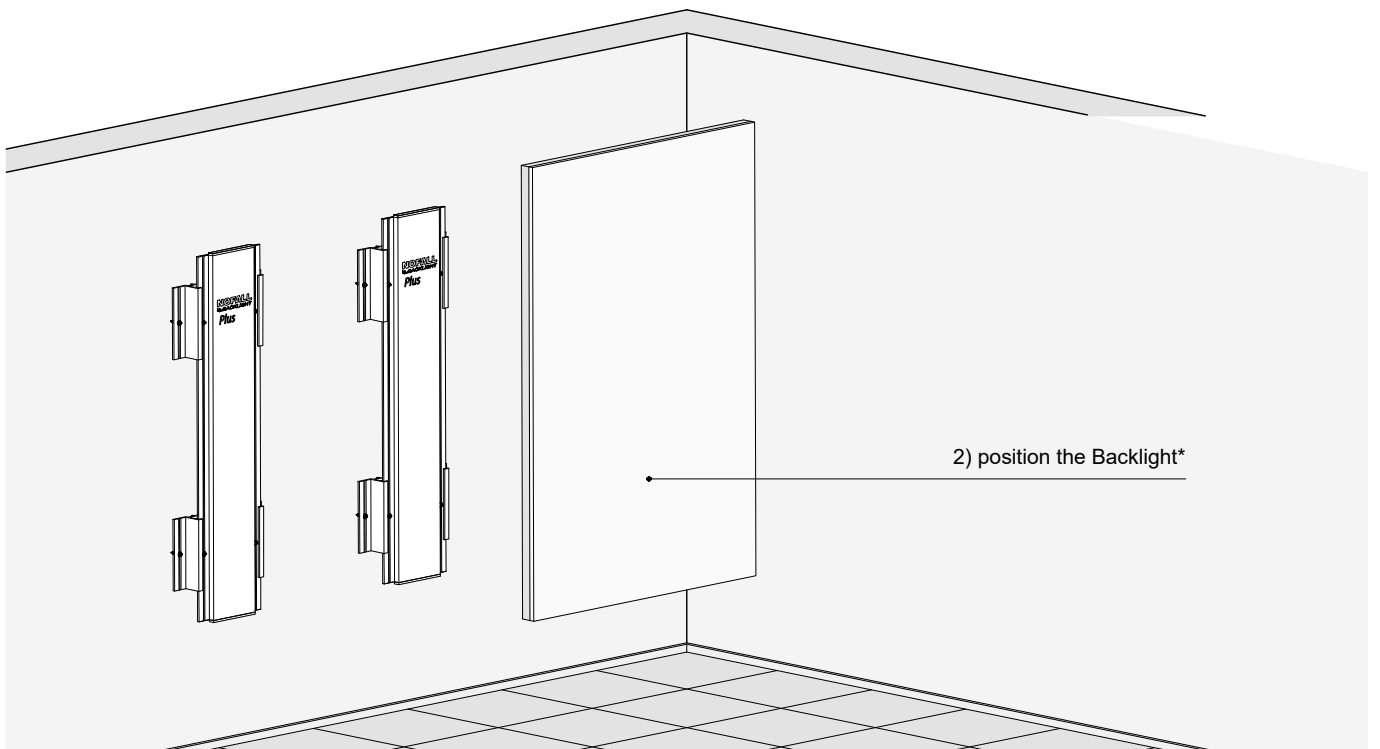

2) position the Backlight\*

\* Backlight panel position will be adjustable once installed