

Some inspirations

SIGNAGES

MANUFACTURER : BACKLIGHT srl

CONTACT info@backlightsrl.com


Representative SCOPE of WORK



Description of SYSTEM

System for Outdoor Signages

Representative SECTION of SYSTEM

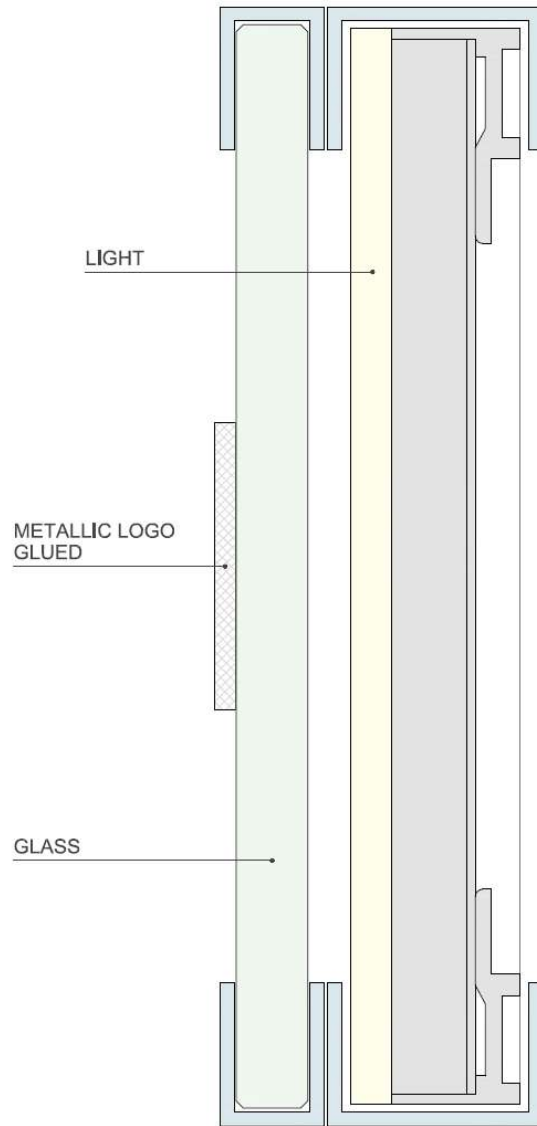

SYSTEM

Lighting Module



Family MAGIC CLOUD

Technical Spec

INPUT 24 VDC
DIMMING ELV/MLV, 0-10V, DALI ,LUTRON , DMX
WATTAGE 14 W and 28 W / line mt - 4.5 and 9.0 W / line ft
LUMENS depending on module size
MIN SIZE 101.6 mm x 101.6 mm - 4 in x 4 in
MAX SIZE 1219.2 mm x 3048 mm - 48 in x 120 in
 (for different sizes please contact us)
WEIGHT 25 Kg/ sq. mt - 5.7 lbs/sq.ft
THICKNESS 23.5 mm - 0.925 in (not including the frame)
CERTIFICATIONS CE-EAC-cULus-Storage Area of Clothes Closet
IP GRADE IP40
DRY LOCATION (DAMP LOCATION UNDER REQUEST)

Kelvin Options

2700 K
 3200 K
 3500 K
 4100 K
 5000 K
 Tunable
 (2700 to 6500K)
 RGB
 RGB+W
 (double layer)

CRI

>80
 >95

PRODUCT USED

Some inspirations

SIGNAGES

MANUFACTURER : BACKLIGHT srl

CONTACT info@backlightsrl.com

Representative SCOPE of WORK


Description of SYSTEM

Representative SECTION of SYSTEM

SYSTEM



System for Indoor Signages visible from outside

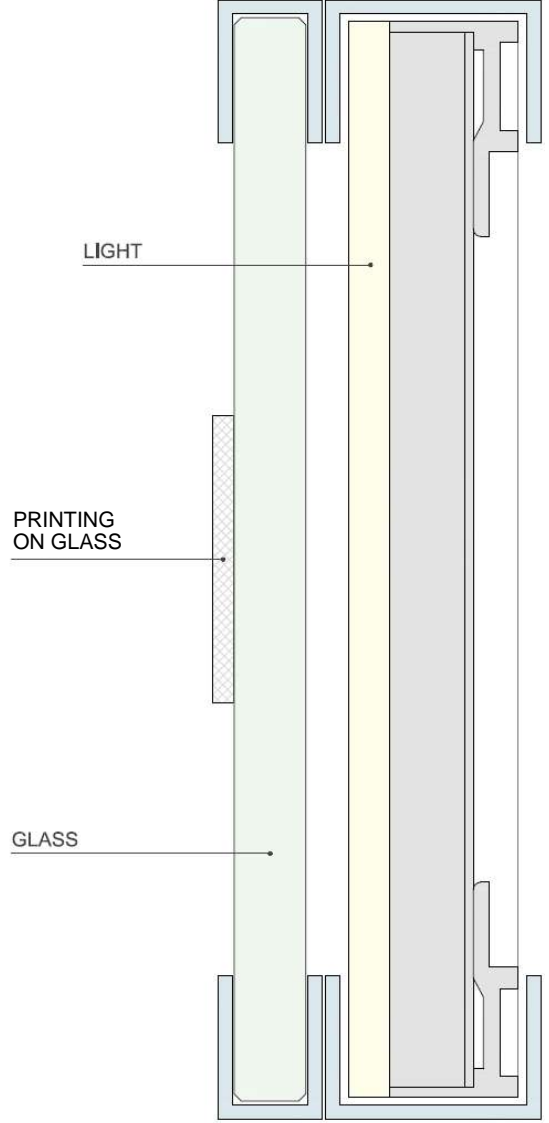

Lighting Module

Technical Spec

Kelvin Options

CRI

PRODUCT USED



Family MAGIC CLOUD

INPUT 24 VDC
DIMMING ELV/MLV, 0-10V, DALI ,LUTRON , DMX
WATTAGE 14 W and 28 W / line mt - 4.5 and 9.0 W / line ft
LUMENS depending on module size
MIN SIZE 101.6 mm x 101.6 mm - 4 in x 4 in
MAX SIZE 1219.2 mm x 3048 mm - 48 in x 120 in
 (for different sizes please contact us)
WEIGHT 25 Kg/ sq. mt - 5.7 lbs/sq.ft
THICKNESS 23.5 mm - 0.925 in (not including the frame)
CERTIFICATIONS CE-EAC-cULus-Storage Area of Clothes Closet
IP GRADE IP40
DRY LOCATION (DAMP LOCATION UNDER REQUEST)

2700 K
 3200 K
 3500 K
 4100 K
 5000 K
 Tunable
 (2700 to 6500K)
 RGB
 RGB+W
 (double layer)

>80
 >95

Some inspirations

SIGNAGES

MANUFACTURER : BACKLIGHT srl

CONTACT info@backlightsrl.com

SYSTEM


Representative SCOPE of WORK



Description of SYSTEM

System for Indoor Signages

Representative SECTION of SYSTEM

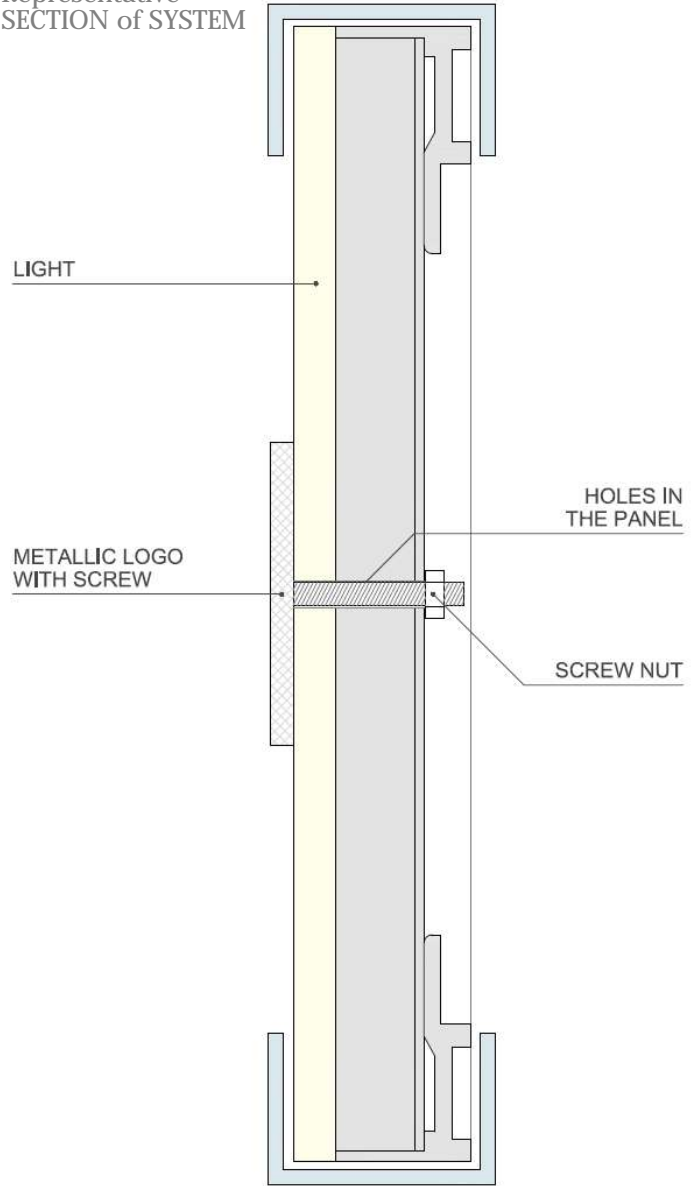

Lighting Module



Family MAGIC CLOUD

Technical Spec

INPUT 24 VDC
DIMMING ELV/MLV, 0-10V, DALI, LUTRON, DMX
WATTAGE 14 W and 28 W / line mt - 4.5 and 9.0 W / line ft
LUMENS depending on module size
MIN SIZE 101.6 mm x 101.6 mm - 4 in x 4 in
MAX SIZE 1219.2 mm x 3048 mm - 48 in x 120 in
 (for different sizes please contact us)
WEIGHT 25 Kg/ sq. mt - 5.7 lbs/sq.ft
THICKNESS 23.5 mm - 0.925 in (not including the frame)
CERTIFICATIONS CE-EAC-cULus-Storage Area of Clothes Closet
IP GRADE IP40
DRY LOCATION (DAMP LOCATION UNDER REQUEST)

Kelvin Options

2700 K
 3200 K
 3500 K
 4100 K
 5000 K
 Tunable
 (2700 to 6500K)
 RGB
 RGB+W
 (double layer)

CRI

>80
 >95

PRODUCT USED

Some inspirations

SIGNAGES

MANUFACTURER : BACKLIGHT srl

CONTACT info@backlightsrl.com

Representative SCOPE of WORK

Description of SYSTEM

Representative SECTION of SYSTEM


SYSTEM



System for Indoor/Outdoor Signages

LIGHT

METAL BOX WITH LASER CUT LOGO

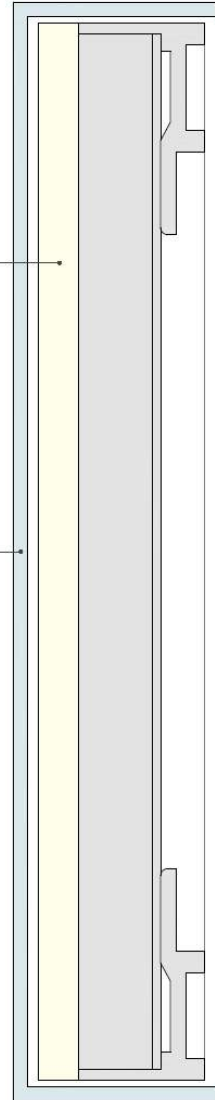

Lighting Module

Technical Spec

Kelvin Options

CRI

PRODUCT USED



Family MAGIC CLOUD

INPUT 24 VDC
 DIMMING ELV/MLV, 0-10V, DALI, LUTRON, DMX
 WATTAGE 14 W and 28 W / line mt - 4.5 and 9.0 W / line ft
 LUMENS depending on module size
 MIN SIZE 101.6 mm x 101.6 mm - 4 in x 4 in
 MAX SIZE 1219.2 mm x 3048 mm - 48 in x 120 in
 (for different sizes please contact us)
 WEIGHT 25 Kg/ sq. mt - 5.7 lbs/sq.ft
 THICKNESS 23.5 mm - 0.925 in (not including the iron)
 CERTIFICATIONS CE-EAC-cULus-Storage Area of Clothes Closet
 IP GRADE IP40
 DRY LOCATION (DAMP LOCATION UNDER REQUEST)

2700 K
 3200 K
 3500 K
 4100 K
 5000 K
 Tunable
 (2700 to 6500K)
 RGB
 RGB+W
 (double layer)

>80
 >95

Some inspirations

SIGNAGES

MANUFACTURER : BACKLIGHT srl

CONTACT info@backlightsrl.com

SYSTEM

Representative SCOPE of WORK




Description of SYSTEM

System for Indoor Signages

Representative SECTION of SYSTEM

OPTION 1

OPTION 2

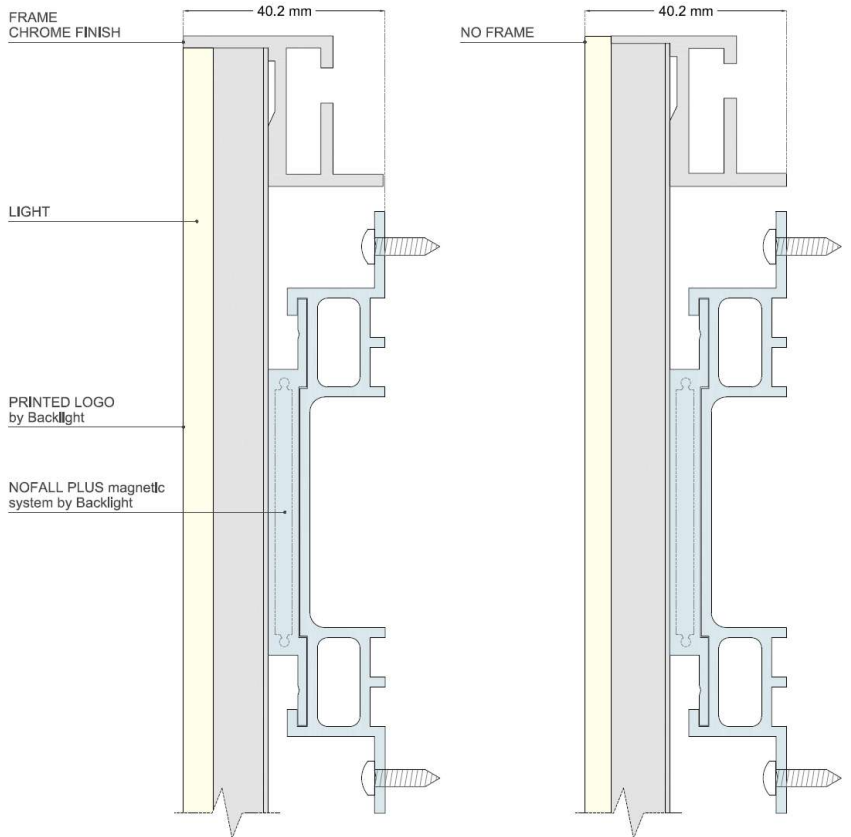

Lighting Module

PRODUCT USED



Family MAGIC CLOUD
NOFALL PLUS

Technical Spec

INPUT 24 VDC
 DIMMING ELV/MLV, 0-10V, DALI ,LUTRON , DMX
 WATTAGE 14 W and 28 W / line mt - 4.5 and 9.0 W / line ft
 LUMENS depending on module size
 MIN SIZE 101.6 mm x 101.6 mm - 4 in x 4 in
 MAX SIZE 609.6 mm x 3048 mm - 24 in x 120 in
 (for different sizes please contact us)
 WEIGHT 25 Kg/ sq. mt - 5.7 lbs/sq.ft
 THICKNESS as per section
 CERTIFICATIONS CE-EAC-cULus-Storage Area of Clothes Closet
 IP GRADE IP40
 DRY LOCATION (DAMP LOCATION UNDER REQUEST)

Kelvin Options

2700 K
 3200 K
 3500 K
 4100 K
 5000 K
 Tunable
 (2700 to 6500K)
 RGB
 RGB+W
 (double layer)

CRI

>80
 >95