


HALO SUSPENDED


SYSTEMS DESCRIPTIONS



The panels were suspended by Steel Cords which were hanged on the existing. No mounting system can be seen on the lighting surface.

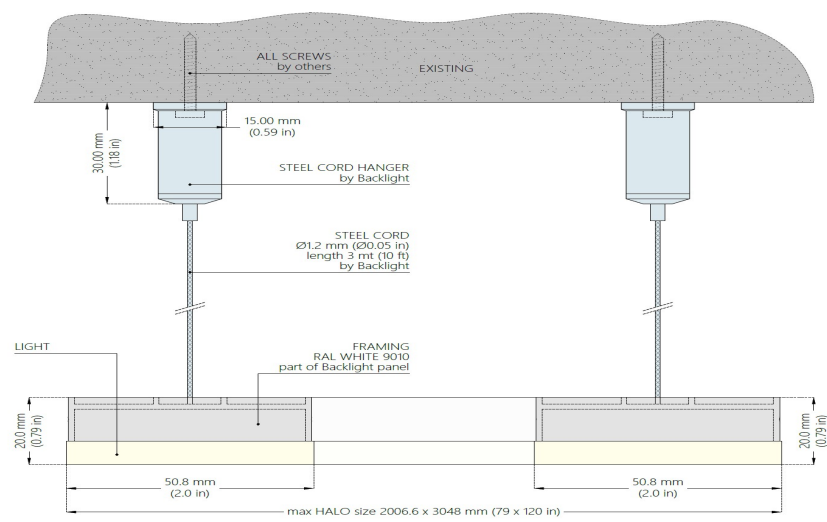

PRODUCT SPECIFICATIONS

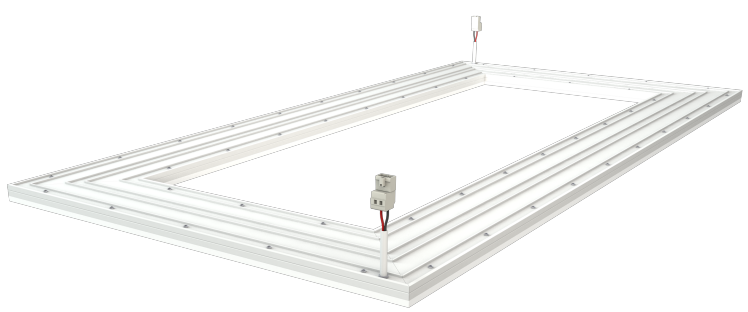INPUT	24 VDC
KELVIN	3000K
CRI	>95
DIMMING	PWM
WATTAGE	14 W for each mt of the perimeter
LUMENS	Standard bright 280 lm per linear ft (890 lm per linear mt) of longer side
LENGHT	914.4 mm (36 In)
WIDTH	914.4 mm (36 In)
WEIGHT	25 Kg/sq. Mt - 5.7 lbs / sq. ft
THICKNESS	28.0 mm - 1.1 in (panel+system)
CABLE OPTION B	
IP GRADE	IP40
WET LOCATION	DAMP LOCATION (ON REQUEST)
CERTIFICATIONS	CE - EAC -cULus - Rohs- Storage Area of Clothes Closet